

Product Range Specification

LPY Series High Energy Pulsed Nd:YAG Lasers

Litron Total Laser Capability

LPY Range Specification Stable and Stable Telescopic Resonators

Model	LPY704-10	LPY706-10	LPY664-10	LPY674-10	LPY764-10	LPY704-20	LPY706-20	LPY664-20	LPY674-20	LPY764-20	LPY704-30	LPY706-30	LPY764-30
Repetition Rate (Hz)	10	10	10	10	10	20	20	20	20	20	30	30	30
Output Energy (mJ)													
1064nm	420	650	850	1000	1250	380	600	800	850	1000	380	550	900
532nm	210	325	425	500	675	190	300	400	425	500	190	225	450
355nm ⁽¹⁾	80	100	130	160	200	70	85	110	130	140	50	80	150
266nm	50	70	95	110	120	50	65	75	80	90	45	60	80
Pulse Stability (±%)													
1064nm	2	2	2	2	2	2	2	2	2	2	2	2	2
532nm	3	3	3	3	3	3	3	3	3	3	3	3	3
355nm	4	4	4	4	4	4	4	4	4	4	4	4	4
266nm	6	6	6	6	6	6	6	6	6	6	6	6	6
Parameter													
Beam Diameter (mm)	6.5	8	8	9.5	8	6.5	8	8	9.5	8	6.5	8	8
Beam Divergence (mrad) ⁽²⁾	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8
M ² @ 1064nm	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5
Pulse Length @1064nm (ns)	6-10	6-10	6-10	6-10	6-10	6-10	6-10	6-10	6-10	6-10	8-10	8-10	8-10
Pointing Stability (μrad) ⁽³⁾	<70	<70	<70	<70	<70	<70	<70	<70	<70	<70	<70	<70	<70
Lamp Life (pulses) ⁽⁴⁾	5x10 ⁷	5x10 ⁷	5x10 ⁷	5x10 ⁷	5x10 ⁷	5x10 ⁷	5x10 ⁷	5x10 ⁷	5x10 ⁷	5x10 ⁷	5x10 ⁷	5x10 ⁷	5x10 ⁷
Timing Jitter (ns) ⁽⁵⁾	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
Services													
Voltage ⁽⁶⁾ (VAC)	200-250	200-250	220-250	220-250	220-250	200-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250
Frequency ⁽⁷⁾ (Hz)	47-63	47-63	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 62	50 or 60	50 or 60	50 or 60
Power Phase	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single
Water Temp Max. (°C)	Air Cooled ⁽⁸⁾	Air Cooled ⁽⁸⁾	20	20	20	Air Cooled ⁽⁸⁾	20	20	20	20	20	20	20
Inlet Pressure (bar)	n/a	n/a	2-5	2-5	2-5	n/a	2-5	2-5	2-5	2-5	2-5	2-5	2-5
PSU Type	LPU1000	LPU1000	16U Rackmount	16U Rackmount	16U Rackmount	LPU1000	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount

Model	LPY704-50	LPY742-50	LPY702-100	LPY704-100	LPY742-100	LPY702-150	LPY732-150	LPY702-200	LPY732-200	LPY604T-10	LPY604T-20	LPY642T-10	LPY642T-20	LPY642T-30
Repetition Rate (Hz)	50	50	100	100	100	150	150	200	200	10	20	10	20	30
Output Energy (mJ)														
1064nm	300	450	100	230	400	90	280	70	200	80	70	350	300	250
532nm	150	225	50	115	200	45	140	35	100	40	35	175	150	125
355nm ⁽¹⁾	40	80	20	20	70	12	30	10	30	20	15	80	70	65
266nm	20	35	10	15	20	7	18	6	10	15	10	40	30	25
Pulse Stability (±%)														
1064nm	2	2	2	2	2	2	2	2	2	2	2	2	2	2
532nm	3	3	3	3	3	3	3	3	3	3	3	3	3	3
355nm	4	4	4	4	4	4	4	4	4	4	4	4	4	4
266nm	6	6	6	6	6	6	6	6	6	6	6	6	6	6
Parameter														
Beam Diameter (mm)	6.5	6.5	6.5	6.5	6.5	5	5	6	6	6.5	6.5	6.5	6.5	6.5
Beam Divergence (mrad) ⁽²⁾	2.5	2	2.5	2.5	2	2.5	2	3	2.5	0.8	0.8	0.8	0.8	0.8
M ² @ 1064nm	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3
Pulse Length @1064nm (ns)	8-10	8-10	10-12	15-18	15-18	15-18	15-18	15-18	15-18	6-10	6-10	6-10	6-10	6-10
Pointing Stability (μrad) ⁽³⁾	<70	<70	<100	<100	<100	<100	<100	<100	<100	<70	<70	<70	<70	<70
Lamp Life (pulses) ⁽⁴⁾	1.5x10 ⁸	1.5x10 ⁸	1.5x10 ⁸	1.5x10 ⁸	1.5x10 ⁸	1.5x10 ⁸	1.5x10 ⁸	1.5x10 ⁸	1.5x10 ⁸	>10 ⁷	>10 ⁷	>10 ⁷	>10 ⁷	>10 ⁷
Timing Jitter (ns) ⁽⁵⁾	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
Services														
Voltage ⁽⁶⁾ (VAC)	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250
Frequency ⁽⁷⁾ (Hz)	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60
Power Phase	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single
Water Temp Max. (°C)	20	20	20	20	20	20	20	20	20	20	20	20	20	20
Inlet Pressure (bar)	2-5	2-5	2-5	2-5	2-5	2-5	2-5	2-5	2-5	2-5	2-5	2-5	2-5	2-5
PSU Type	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount

(1) Higher conversion efficiency into 3rd harmonic available using Type 1 doubler.
 (2) Full angle for 90% of the output energy.
 (3) Full angle.
 (4) Typical lifetime.
 (5) Jitter is measured with respect to the Q-switch trigger input.
 (6) 110VAC option requires autotransformer to be specified on order.
 (7) 50 or 60Hz to be specified on order.
 (8) Ambient Temperature 5-35°C. (0-80% non condensing atmosphere.)

All LPY700 series systems feature a birefringence compensating twin rod oscillator design. The LPY600 series are single rod oscillator/oscillator-amplifiers.

LPY Range Specification Gaussian Coupled Resonators

Model	LPY704G-10	LPY 706G-10	LPY707G-10	LPY674G-10	LPY764G-10	LPY776G-10	LPY787G-10	LPY704G-20	LPY706G-20	LPY707G-20	LPY674G-20	LPY764G-20	LPY776G-20	LPY787G-20
Repetition Rate (Hz)	10	10	10	10	10	10	10	20	20	20	20	20	20	20
Output Energy (mJ)														
1064nm	400	650	850	1000	1250	1600	2000	380	600	800	850	1000	1400	1800
532nm	200	325	425	500	675	800	1000	190	300	400	425	500	700	900
355nm ⁽¹⁾	80	110	150	180	225	320	400	70	90	130	150	140	280	380
266nm	50	70	95	110	125	160	195	45	65	75	80	90	140	180
Pulse Stability (±%)														
1064nm	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2
532nm	<4	<4	<4	<4	<4	<4	<4	<4	<4	<4	<4	<4	<4	<4
355nm	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
266nm	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
Parameter														
Beam Diameter (mm)	6	8	8	9.5	9.5	9.5	12.5	6	8	9.5	9.5	9.5	9.5	12.5
Beam Divergence (mrad) ⁽²⁾	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
M ² @ 1064nm	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2
Pulse Length @1064nm (ns)	6-9	6-9	6-9	6-9	6-9	6-9	6-9	6-9	6-9	6-9	6-9	6-9	6-9	6-9
Pointing Stability (μrad) ⁽³⁾	<70	<70	<70	<70	<70	<70	<70	<70	<70	<70	<70	<70	<70	<70
Lamp Life (pulses) ⁽⁴⁾	>5x10 ⁷	>5x10 ⁷	>3x10 ⁷	>3x10 ⁷	>3x10 ⁷	>3x10 ⁷	>3x10 ⁷	>5x10 ⁷	>5x10 ⁷	>3x10 ⁷	>3x10 ⁷	>3x10 ⁷	>3x10 ⁷	>3x10 ⁷
Timing Jitter (ns) ⁽⁵⁾	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
Services														
Voltage ⁽⁶⁾ (VAC)	200-250	200-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250
Frequency ⁽⁷⁾ (Hz)	47-63	47-63	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60
Power Phase	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single
Water Temp Max. (°C)	Air Cooled ⁽⁸⁾	Air Cooled ⁽⁸⁾	20	20	20	20	20	Air Cooled ⁽⁸⁾	20	20	20	20	20	20
Inlet Pressure (bar)	n/a	n/a	2-5	2-5	2-5	2-5	2-5	n/a	2-5	2-5	2-5	2-5	2-5	2-5
PSU Type	LPU1000	LPU1000	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount
Model	LPY704G-30	LPY706G-30	LPY764G-30	LPY774G-30	LPY787G-30									
Repetition Rate (Hz)	30	30	30	30	30									
Output Energy (mJ)														
1064nm	380	550	900	1200	1500									
532nm	190	225	450	600	750									
355nm ⁽¹⁾	50	80	150	260	300									
266nm	45	60	80	120	150									
Pulse Stability (±%)														
1064nm	<2	<2	<2	<2	<2									
532nm	<4	<4	<4	<4	<4									
355nm	<6	<6	<6	<6	<6									
266nm	<10	<10	<10	<10	<10									
Parameter														
Beam Diameter (mm)	6	8	9.5	9.5	9.5									
Beam Divergence (mrad) ⁽²⁾	0.5	0.5	0.5	0.5	0.5									
M ² @ 1064nm	<2	<2	<2	<2	<2									
Pulse Length @1064nm (ns)	6-9	6-9	6-9	6-9	6-9									
Pointing Stability (μrad) ⁽³⁾	<70	<70	<70	<70	<70									
Lamp Life (pulses) ⁽⁴⁾	>3x10 ⁷	>3x10 ⁷	>3x10 ⁷	>3x10 ⁷	>3x10 ⁷									
Timing Jitter (ns) ⁽⁵⁾	<0.5	<0.5	<0.5	<0.5	<0.5									
Services														
Voltage ⁽⁶⁾ (VAC)	200-250	220-250	220-250	220-250	220-250									
Frequency ⁽⁷⁾ (Hz)	47-63	50 or 60	50 or 60	50 or 60	50 or 60									
Power Phase	Single	Single	Single	Single	Single									
Water Temp Max. (°C)	Air Cooled ⁽⁸⁾	20	20	20	20									
Inlet Pressure (bar)	n/a	2-5	2-5	2-5	2-5									
PSU Type	LPU1000	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount									


All LPY700 series systems feature a birefringence compensating twin rod oscillator design. The LPY600 series are single rod oscillator/oscillator-amplifiers.

(1) Higher conversion efficiency into 3rd harmonic available using Type 1 doubler.
 (2) Full angle for 90% of the output energy.
 (3) Full angle.
 (4) Typical lifetime.
 (5) Jitter is measured with respect to the Q-switch trigger input.
 (6) 110VAC option requires autotransformer to be specified on order.
 (7) 50 or 60Hz to be specified on order.
 (8) Ambient Temperature 5-35°C. (0-80% non condensing atmosphere.)

LPY Range Dimensions




Single Rail Laser Head Arrangement

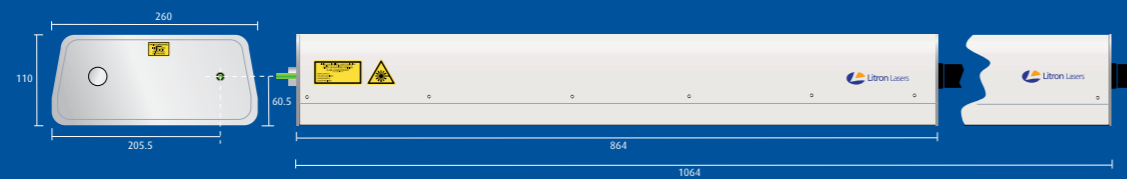


Twin Rail Laser Head Arrangement

All dimensions shown in mm

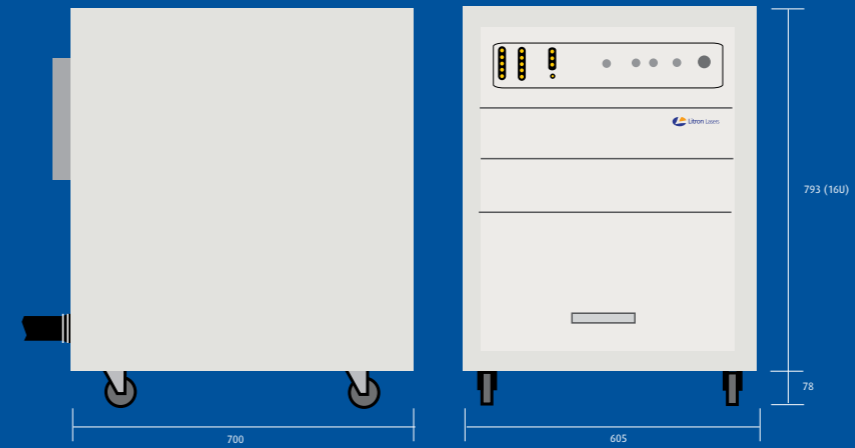

16U Rackmount PSU

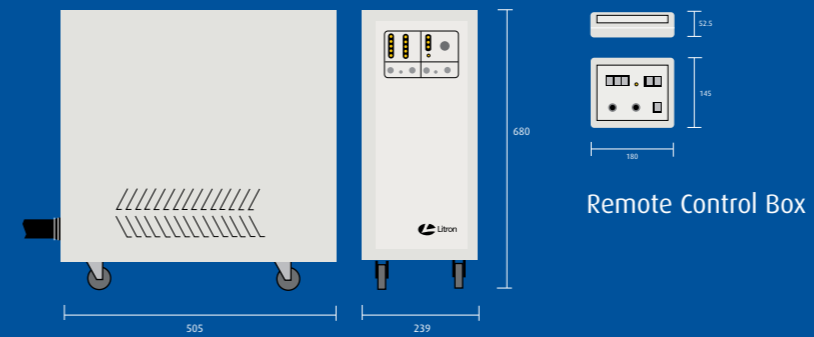

LPU1000 PSU

Remote Control Box



Our policy is to improve the design and specification of our products. The details given in this document are not to be regarded as binding.

HEAD OFFICE
Litron Lasers Ltd
 8 Consul Road
 Rugby
 Warwickshire CV21 1PB
 England

T +44 (0)1788 574444
 F +44 (0)1788 574888
 E sales@litron.co.uk

NORTH AMERICAN OFFICE
Litron Lasers North America
 2449 Arnica Drive
 Bozeman
 MT 59715
 USA

T +1 (406) 522 7566
 F +1 (406) 522 7567
 E sales@litronlasers.com

www.litronlasers.com